



Install VR-H adapter

9

5  
Warning:  
You have to seal  
the joints with teflon.  
(minimum 15 rounds of teflon).

## Installation Instructions

### Swing Drinker con VR-H

Cod. 1130100P

4


For Wean to Finish  
minimum height 1m

6  
Install lock

1m  
70cm

10  
Fix pipe lock

For anchoring  
bolts to wall  
(Not included)

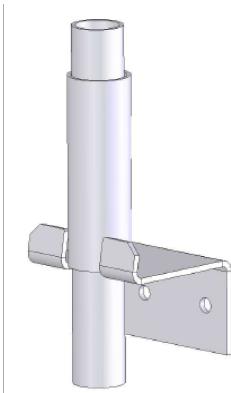

8

Install clamp  
just under  
the pipe bracket

2

Warning:  
The rear part of the bowl  
have to be solid in order to  
protect from animals agresion

7  
Install the clamp  
leaving the pipe in its  
minimum level

1

Fix with  
4 bolts D8

3  
Install o-ring seal  
and axle. Tighten nut

