



Technical data

Voltage	U	230	V
Phase	1	~	
Frequency		50	Hz
Speed		935	RPM
Power consumption	P _e	430	W
Nominal current	I	2	A
Maximum current	I	2.9	A
Capacitor		12/400	μF
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level	L _p	64	db(A)
Sound pressure level distance		2	m
Weight		28.8	kg
Packing dimensions		825x825x395	mm

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

Characteristics

0 Pa	14650 m ³ /h
------	-------------------------




Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

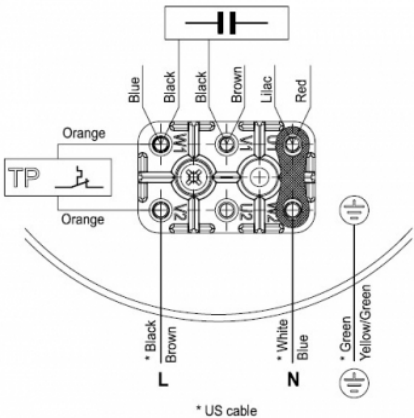

Dimensions

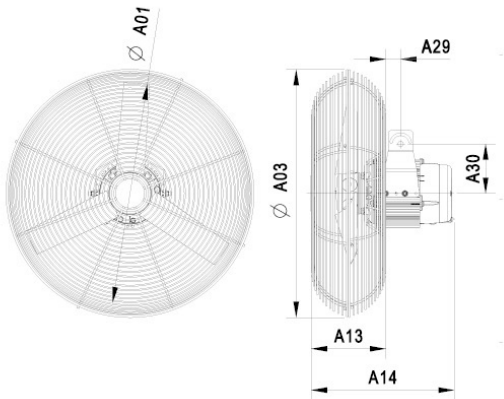

A01:	709 mm
A03:	830 mm
A13:	230 mm
A14:	413 mm
A29:	29 mm
A30:	115 mm