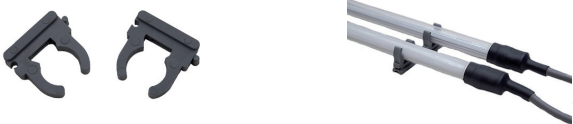


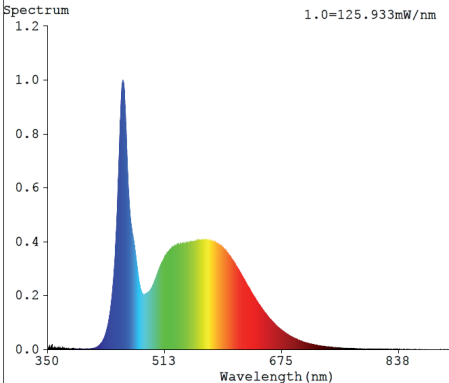


Productnr.: 21.  100% Mercury free  Environmentally friendly Comparison: 36W fluorescent tube 3200lm with 360° + consumption ballast ca.43W 43 kWh/1000h	AGRO LED 120cm 20W 6000K frosted cover - Low energy consumption of 17,7 Watt - 120° Radiation angle with 2.302 Lumen - Low heat development - Long lifetime up to 50,000 h - Diameter 26,3mm - Quicksilver- and lead-free Technical data: Voltage 230V / 50 Hz (from 100V up to 240V) Lightcolor (CCT) 6000 K +/- 200 K Total Lumen 2.302 Lm -> 130,0 Lm/Watt Radiation angle 120° / RA >80 Powerconsumption 17,7 Watt / cos phi > 0,964 Operation temperatue -20°C up to 40°C Temperature surface >1h max. ca. 45°C Diameter 26,3mm / Length with cable ±135cm Weight ±500 g (with cablelength 0,5m) Cable: 50cm YMVK DCA 2x2,5mm² (Ø10,5mm) CE certified und tested according EMV RoHS certified According EN60825-1 (VDE 0837 Part 1) Radiation safety with Laser and LED Single-sided power supply Durability LM80 (TM21) L90B50 > 50.000h Protection IP67 Not dimmable. 17,7 kWh /1000h Assembly 	Productimage  cable side  blind side 130,0 Lm/Watt Single-sided power supply AC 230V 2x2,5mm²  135cm Pictograms    double isolated / no grounding  Fire safety certificate EN60598-2-24
17,7 Watt 2.302 Lm 	Packaging information  Packingsunit: 173cm x 26cm x 22cm Packingsweight: 28 Kg # Lights in 1 pack: 48 pieces (with 0,5m cable)	 Spectrum 1.0=125.933mW/nm