



NITRI-COMFORT

44-520



CHARACTERISTICS

- Unpowdered non-sterile disposable nitrile glove
- Glove with relief
- Smooth interior
- Extremely easy to slip on due to the rolled cuff
- Ambidextrous design
- 100% latex-free to accommodate users with a latex allergy
- Free of silicones
- Length: 240 mm and thickness: 0.10 mm
- Weight: 4.7 grams (+/- 0.2 grams)
- AQL 1,5 (EN 374)
- Suitable for contact with many types of food products
- Meets the requirements of the EN 455 standard for medical disposable gloves
- Packaged per 100 units in a dispenser

Article number: 1.44.520.00

SUITABLE FOR ACTIVITIES IN E.G.

- Food industry
- Agriculture
- Hospitality
- Maintenance
- Chemical sector
- Automotive

COLOUR

Blue

SIZES

7/S to 11/ XL incl.

PACKAGING

- 100 units per dispenser
- 10 dispensers in outer box

EN ISO 374-1:2016
+A1:2018/Type B



EN ISO 374-5:
2016



EN 421:2010




CE 2777

EN 420:2003+A1:2009

PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN CODE 100 UNITS (DISPENSER)	EAN CODE 10 DISPENSERS (OUTER BOX)
7/S	1.44.520.07	8718249008504	8718249065569
8/M	1.44.520.08	8718249008528	8718249065576
9/L	1.44.520.09	8718249008542	8718249065583
10/XL	1.44.520.10	8718249008566	8718249065590
11/XXL	1.44.520.11	8718249008580	8718249065606

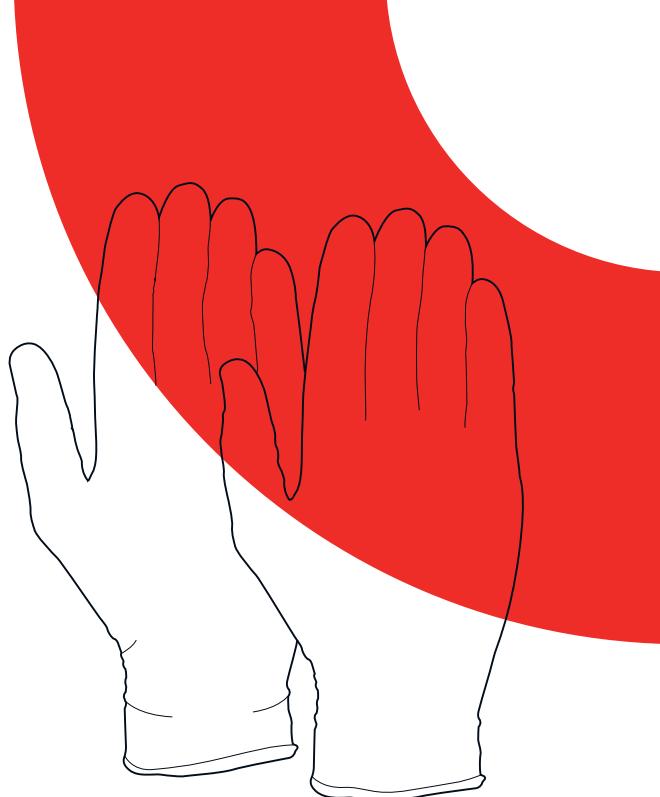

CLARIFICATION OF PICTOGRAMS

Protection against chemicals and microorganisms

EN ISO 374-1:2016/Type B		
EN ISO 374-1:2016 /Type A	Chemicals	EN 16523:2015 permeation level
	40% Sodium Hydroxide (K) 30% Hydrogen peroxide (P) 37% Formaldehyde (T)	6 4 6

Resistant against bacteria, mould and viruses

EN ISO 374-5:2016		
EN ISO 374-2:2014	Resistance against bacteria and mould	Resistance against viruses
	PASS	PASS

EN ISO 374-4:2019	
Cas number	Class
(K) 1310-73-2	Inorganic base
(P) 7722-84-1	Peroxide
(T) 50-00-0	Aldehyde
Chemicals	Average degradation %
40% Sodium Hydroxide (K)	>3.9%
30% Hydrogen peroxide (P)	8.1%
37% Formaldehyde (T)	2.9%

EN ISO 374-2:2014	
Air leak test - Pass	Water leak test - Pass

EN ISO 374-1:2016 Permeation levels are based on the following breakthrough times:

Performance level	1	2	3	4	5	6
Minimal breakthrough times (in min.)	>10	>30	>60	>120	>240	>480

EN 421:2010



Protection against contamination with radioactive particles.

Note: This glove does not protect the wearer against mechanical hazards.

RELATED PRODUCTS



NITRI-STRONG 44-530

Art. no. 1.44.530.00

YOUR SUPPLIER: